




## Operating Instructions

---

Thanks for purchasing our product.  
Please be sure to read this instruction manual  
Carefully before using our product.

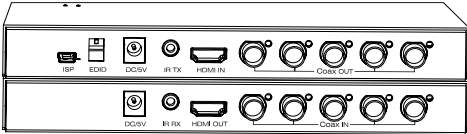



# Introduction

EX0101-C01/C02 is a HDMI extender using 5 coaxial cable as transmission media.

Benefits from using EX0101-C01/C02:

- 1) The length of HDMI cable is fixed and unchangeable after it is produced. Because the HDMI connector can only be soldered or terminated by professional worker in factory, the users can not reduce or increase by themselves. However five coaxial cable are available and be processed easily by the user or installer.
- 2) By using EX0101-C01/C02, the transmission distance for 1080P reaches 100 meters. For general HDMI cables, cables must be customized when the length over 10 meters.
- 3) EX0101-C01/C02 has the ability of buffering and amplifying. Series connection of EX0101-C01/C02 achieves long distance transmission of HDMI signal. When two pairs or more EX0101-C01/C02 are sacked together, they can be used to create a larger distribution (Daisy chained.)
- 4) The IR system could control the sources from the termination.

EX0101-C01/C02 offers solutions for digital entertainment center, HDTV retail and show site, HDTV, STB, DVD and Projector factory, noise, space and security concerns, data center control, information distribution, conference room presentation, school and corporate training environments.



# Contents


---

---

|                                       |    |
|---------------------------------------|----|
| HDMI Extender .....                   | 2  |
| ■ Product Overview.....               | 2  |
| ■ Features.....                       | 2  |
| ■ Package Contents.....               | 4  |
| ■ Connections and Operations .....    | 4  |
| ■ Specifications .....                | 5  |
| ■ Panel Descriptions .....            | 7  |
| ■ Typical Application .....           | 9  |
| ■ Maintenance .....                   | 9  |
| ■ Product Service.....                | 9  |
| ● Provided Service.....               | 9  |
| ● Mail-In Service .....               | 10 |
| ● Warranty .....                      | 10 |
| ● Warranty Limits And Exclusions..... | 11 |

## HDMI Extender (By five coaxial cable)

### ■ Product Overview ( Model Number: EX0101-C01/C02)

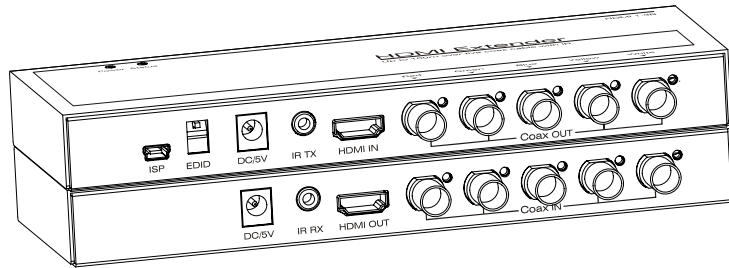

### ■ Features

- One pair as a full functional module, simple operation.
- Use five coaxial cable to substitute HDMI cable to achieve long distance transmission.
- Transmission distance reaches up to 100 meters under the video format of 1080P.
- Auto-adjustment of feedback, equalization and amplify, the user does not need to care about the length of the cable.
- HDMI V1.3b supported.
- Each port supports HDMI or DVI inputs.
- HDCP compliant.
- With LED indicators to show the power and video signal status.
- With ESD protection inside.
- Mounting ears supplied.
- Transfer Infrared control signal together with the HDMI signal.
- This model could be cascaded.

## Notice

Grandbeing Inc. reserves the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

### Warning

To reduce the risk of fire, electric shock or product damage:



1. Do not expose this apparatus to rain, moisture, dripping or splashing and that no objects filled with liquids, such as vases, shall be placed on the apparatus.



6. Clean this apparatus only with dry cloth.



2. Do not install or place this unit in a bookcase, built-in cabinet or in another confined space. Ensure the unit is well ventilated.



7. Unplug this apparatus during lightning storms or when unused for long periods of time.



3. To prevent risk of electric shock or fire hazard due to overheating, do not obstruct the unit's ventilation openings with newspapers, tablecloths, curtains, and similar items.



8. Protect the power cord from being walked on or pinched particularly at plugs.



4. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.



9. Only use attachments / accessories specified by the manufacturer.



5. Do not place sources of naked flames, such as lighted candles, on the unit.





10. Refer all servicing to qualified service personnel.


## ■ Package Contents

- ① Main unit NO.1. P/N\_EX0101-C01.
- ② Main unit NO.2. P/N\_EX0101-C02.
- ③ Mounting ears.
- ④ Operating instructions. P/N\_INSEX0101-C01/C02.
- ⑤ 2x 5VDC power supply P/N\_VDC0501.(One for C01,one for C02).
- ⑥ IR TX unit (IR emitter cable) for C01.
- ⑦ IR RX unit (IR receiver cable) for C02.

 **NOTE:** PART NUMBER (Abbreviation as P/N).

## ■ Connections and Operations

- 1) Connect the HDMI input source (  such as HD-DVD、PS3、STB etc. )into EX0101-C01.
- 2) Connect five coaxial cables to both the outputs of EX0101-C01 and inputs of EX0101-C02. Please pay attention that the right connection of the two cables, match the colors.
- 3) Connect the HDMI output(  such as HD-LCD 、 HD-DLP ) into EX0101-UC02.
- 4) Connect the IR TX UNIT into EX0101-C01 IR TX; Connect the IR RX UNIT into EX0101-C02 IR RX.
- 5) DIP switch description.

 **NOTE:** DIP switch from left to right match Position 1, Position 2 in the table below.  
ON: 1, OFF: 0

| Position.1 | Position.2 | Functions |
|------------|------------|-----------|
|------------|------------|-----------|

|   |   |  |
|---|---|--|
| 0 | 0 | Copy EDID from the specific sink (note1)   |
| 0 | 1 | 1080P stereo (Using Embedded EDID) (note2) |
| 1 | 0 | 1080P 5.1 (Using Embedded EDID) (note3)    |
| 1 | 1 | 1080P 7.1(Using Embedded EDID) (note4)     |

 **Note1:**

In this mode, the EDID data of the sink device such as TV set will be passed to the HDMI source without any changing.

 **Note2:**


The extender will use the embedded 1080P-stereo EDID when the DIP switch is in this mode. The EDID will be 1080P video and stereo audio.

 **Note3:**

The extender will use the embedded 1080P-5.1 EDID when the DIP switch is in this mode. The EDID will be 1080P video and 5.1 audio.

 **Note4:**


The extender will use the embedded 1080P-7.1 EDID when the DIP switch is in this mode. The EDID will be 1080P video and 7.1 audio.

 **Attention:** Please insert and extract cables gently.

## ■ Specifications

|                             |   |
|-----------------------------|---|
| Operating Temperature Range | -5 to +35°C (-41 to +95 °F)                       |
| Operating Humidity Range    | 5 to 90 % RH (no condensation)                    |
| Input Video Signal          | 0.5-1.0 volts p-p                                 |
| Input DDC Signal            | 5 volts p-p (TTL)                                 |
| Video Format Supported      | DTV/HDTV;<br>1080P/1080i/720P/576P/480P/576i/480i |


|                               |  |
|-------------------------------|--|
| Output Video                  | HDMI 1.3+HDCP (repeat the source to the sink) ,support 3D video of HDMI1.4, support deepcolor. |
| Output Audio                  | Support DTS-HD, Dolby-HD (repeat the source to the sink)                                       |
| Maximum Transmission Distance | 100m   |
| Power Supply                  | 5VDC   |
| Power Consumption             | 1.5Watts (Max.)  |
| Dimensions                    | 207mmHx71mmWx24mmD<br>/1.8"Wx3.3"Hx0.9"D   |
| Mass (Main unit)              | 0.8Kgs (Pairs)/1.16lb  |
| IR frequency                  | 30~60KHZ   |

 **NOTE:** Specifications are subject to change without notice. Mass and dimensions are approximate.

## ■ Panel Descriptions


### 1. EX0101-C01

#### Front Panel

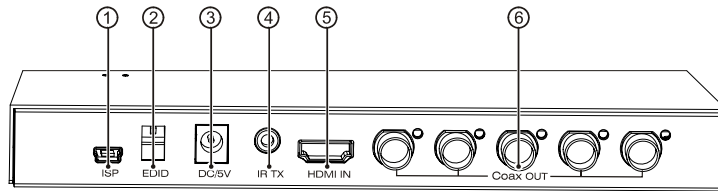

- ① ISP, for update the firmware of the product.
- ② DIP switch, for EDID setting.
- ③ Power input, 5VDC .
- ④ IR TX output.
- ⑤ HDMI input.
- ⑥ Coaxial outputs.


#### Top Panel

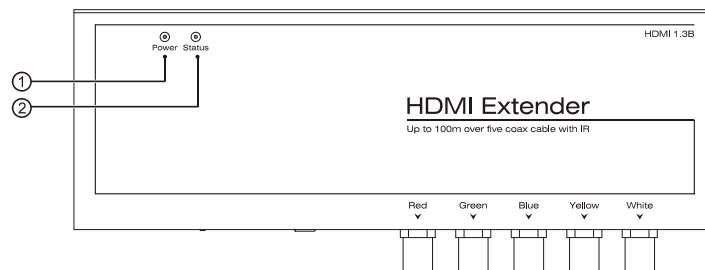

- ① Status of power input. When power input on, the LED inside lights.
- ② Status of signal connection. When this works well, the LED inside lights.


2. EX0101-C02

**Front Panel**

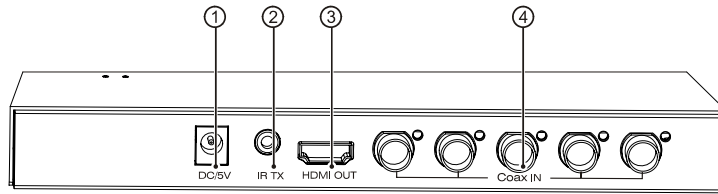


- ① Power input, 5VDC.
- ② IR RX input.
- ③ HDMI output.
- ④ Coaxial inputs.

**Top Panel**

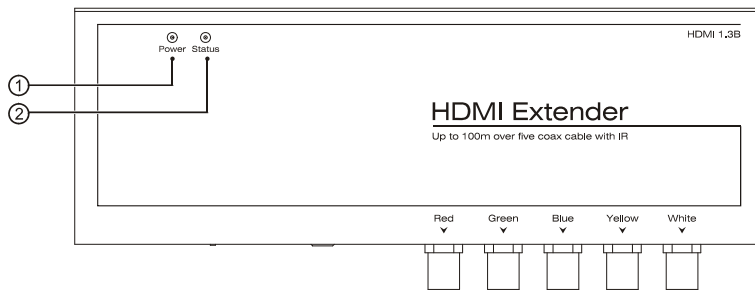

- ① Status of power input. When power input on, the LED inside lights.
- ② Status of signal connection. When this works well, the LED inside lights.

## ■ Typical Application

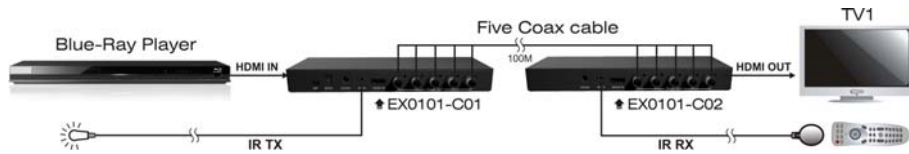

## ■ Maintenance

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner or benzine to clean this unit.

## ■ Product Service

### ● Provided Service

- 1) **Damage Requiring service:** The unit should be serviced by qualified service personnel if:
  - The DC power supply cord or AC adaptor has been damaged;
  - Objects or liquids have gotten into the unit;
  - The unit has been exposed to rain;
  - The unit does not operate normally or exhibits a marked change in performance;
  - The unit has been dropped or the cabinet damaged.
- 2) **Servicing Personnel:** Do not attempt to service the unit beyond that described in these operating instructions. Refer all other servicing to authorized servicing personnel.
- 3) **Replacement parts:** When parts need replacing ensure the service uses parts specified by the manufacturer or parts that have the same

characteristics as the original parts. Unauthorized substitutes may result in fire, electric shock, or other hazards.

- 4) **Safety check:** After repairs or service, ask the service to perform safety checks to confirm that the unit is in proper working condition.

#### ● Mail-In Service

When shipping the unit, carefully pack and send it prepaid, adequately insured and preferably in the original carton. Include a letter detailing the complaint and provide a daytime phone and/or email address where you can be reached.

If repair is needed during the limited warranty period the purchaser will be required to furnish a sales receipt/proof of purchase indicating date of purchase, amount paid and place of purchase. Customer will be charged for the repair of any unit received without such proof of purchase.

#### ● Warranty

If your product does not work properly because of a defect in materials or workmanship, Grandbeing Company (referred to as “the warrantor”) will, for the length of the period indicated as below, (**Parts (1) Year, Labor(90) Days**) which starts with the date of original purchase (“Limited Warranty period”), at its option either (a) repair your product with new or refurbished parts, or (b) replace it with a new or a refurbished product. The decision to repair or replace will be made by the warrantor.

During the “Labor” Limited Warranty period there will be no charge for labor. During the “Parts” warranty period, there will be no charge for parts. You must mail-in your product during the warranty period. This Limited Warranty is extended only to the original purchaser and only covers product purchased as new. A purchase receipt or other proof of original purchase date is required for Limited Warranty service.

## ● **Warranty Limits And Exclusions**

- 1) **This Limited Warranty ONLY COVERS failures due to defects in materials or workmanship, and DOES NOT COVER normal wear and tear or cosmetic damage.** The Limited Warranty ALSO DOES NOT COVER damages which occurred in shipment, or failures which are caused by products not supplied by the warrantor, or failures which result from accidents, misuse, abuse, neglect, mishandling, misapplication, alteration, faulty installation, set-up adjustments, maladjustment of consumer controls, improper maintenance, power line surge, lightning damage, modification, or service by anyone other than a Factory Service Center or other Authorized Service, or damage that is attributable to acts of God.
- 2) **There are no express warranties except as listed under “limited warranty coverage”. The warrantor is not liable for incidental or consequential damages resulting from the use of this product, or arising out of any breach of this warranty.** (As examples, this excludes damages for lost time, cost of having someone remove or re-install an installed unit if applicable, travel to and from the service location, loss of or damage to media or images, data or other recorded content. The items listed are not exclusive, but are for illustration only.)
- 3) **Parts and service, which are not covered by this limited warranty, are your responsibility.**





**Grandbeing Technology Co., Ltd.**

Address:

---

6C, Jialitai Building, No. 6 Yanshan Road,  
Nanshan District Shenzhen, P.R. China

---

Tel: 86-755-26678449/Fax: 86-755-26678549  
Post Code: 518067

---

[www.grandbeing.biz](http://www.grandbeing.biz)